




HOTCHKISS AIR SUPPLY

Heating, Ventilating & Air Movement Equipment

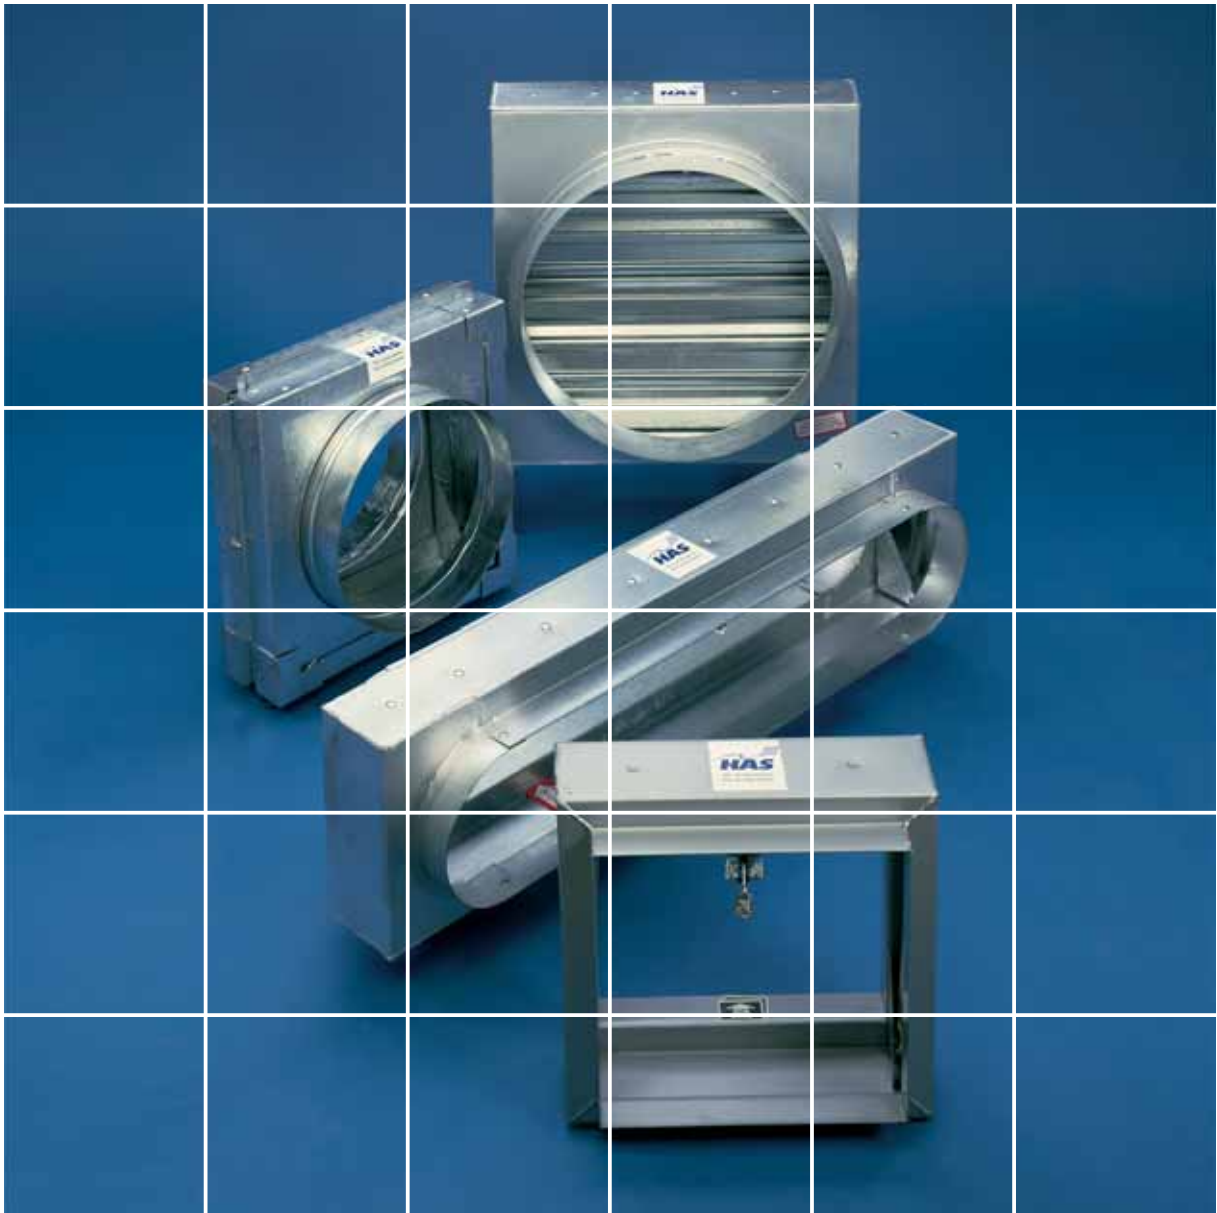

F i r e D a m p e r s



Description

The HAS range of curtain bladed fire dampers is designed to stop the spread of flame through ducts, walls, floors and ceilings. All standard dampers have a 2-hour fire rating, have been tested to BS476 and conform to the relevant sections of DW 144.

Construction

Standard dampers are manufactured of galvanised mild steel. Alternatively, blades can be manufactured in stainless steel.

Fusible Link

Blades are held in the open position by a straight bar link rated at 72°C into a formed reinforcing swage and two location holes. Higher rated links can be supplied if required.

HEVAC/HVCA Installation Frames

These are available if required and are factory fitted. These frames allow expansion without either distorting or exerting severe stresses within the surrounding structure into which the assembly is installed.

Features

- ¥ Suitable for low, medium and high velocity
- ¥ Galvanised or stainless steel blades and casings
- ¥ Infinite sizing to customers exact requirements (see catalogue)
- ¥ Comprehensive control options
- ¥ Suitable for rectangular, circular and flat oval ducting
- ¥ Fully tested and approved to BS476

Head Office:
Heath Mill Road, Wombourne,
Wolverhampton,
West Midlands, WV5 8AP
Tel: (01902) 895161
Fax: (01902) 892045

www.hotchkissairsupply.co.uk email: sales@hotchkissairsupply.co.uk