




## **HOTCHKISS AIR SUPPLY**

Heating, Ventilating & Air Movement Equipment

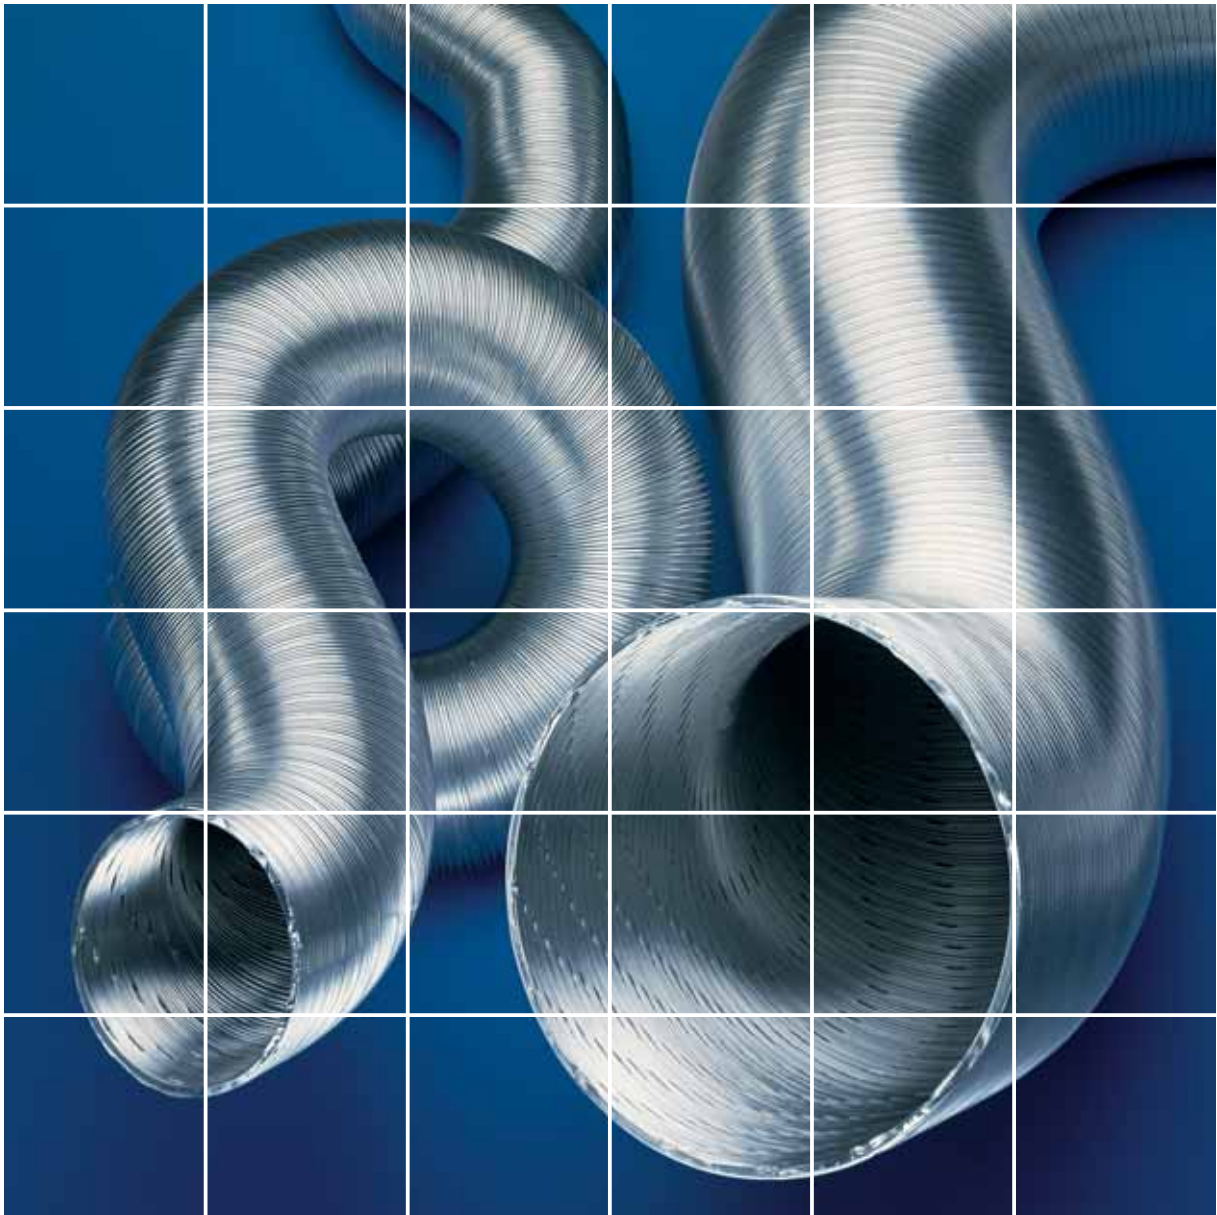

H a s f l e x P A K F l e x i b l e D u c t i n g



## Application

The HASFLEX PAK is a range of corrugated flexible ducting in aluminium which can be easily formed to produce bends with radii less than 1/2 dia. HASFLEX PAK offers extra flexibility coupled with strength to meet the needs required for various industrial purposes as well as many HVAC applications.

## Construction

HASFLEX PAK is manufactured from 99% pure aluminium strip spirally wound to produce a double overlapped crimp locked joint, which is resistant to unwinding and is pressure tight to 2500 pa.

## Advantages

- Naturally retains its corrugation form and also achieves maximum distance between supports without sagging
- Supplied in standard 4 metre lengths compressed to 1 metre
- Individually boxed
- Strong and flexible
- Easy to connect to circular ducting
- No special tools required for cutting or fixing
- The products have been successfully tested to BS476 part 6, 7 and 8 with negligible smoke generation

## Technical data

|                                |  |
|--------------------------------|--|
| Duct material                  | 99% Pure aluminium   |
| Diameter range (mm)            | 80-500   |
| Temperature range °C           | -30/+280   |
| Maximum air velocity           | 25m/sec  |
| Max. positive working pressure | 2500Pa   |
| Standard length                | 4 metre  |
| Compressed length              | 1 metre  |
| Packing                        | Individual boxed   |
| Clamping                       | Hasflex Lightning Band, Stainless Steel Clamps, Quick Release Clamps |

**Head Office:**  
Heath Mill Road, Wombourne,  
Wolverhampton,  
West Midlands, WV5 8AP  
Tel: (01902) 895161  
Fax: (01902) 892045

[www.hotchkissairsupply.co.uk](http://www.hotchkissairsupply.co.uk) email: [sales@hotchkissairsupply.co.uk](mailto:sales@hotchkissairsupply.co.uk)