



## **HOTCHKISS AIR SUPPLY**

Heating, Ventilating & Air Movement Equipment




S u p p l y   &   E x h a u s t   V a l v e s

## Plastic Supply/Extract Air Valves (VL)

Having the benefit of being used in supply or extract applications HAS polypropylene air valves are suitable for wall, ceiling or exposed duct mounting. A central disc is attached to a threaded rod making the valve infinitely adjustable and a locking nut ensures settings are securely maintained.

**Fixing:** As standard a mounting ring is supplied with each valve. The mounting ring should be securely fixed into the duct before the valve is pushed into the ring.

**Construction:** Both the valve and mounting rings are manufactured from a durable white polypropylene material. This offers the benefit of being anti-static and corrosion resistant making them ideal for use in humid environments.

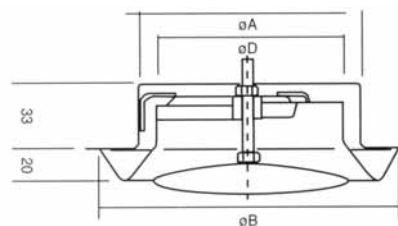

Duct Dia	A	B	D
100	100	150	80
125	125	170	100
150	150	190	120
200	200	240	170


## Steel Supply Air Valves (VMS)

Designed to keep cost levels to a minimum whilst offering a robust and attractive appearance HAS steel supply valves are ideal for virtually any application. Simple regulation of the airflow is achieved by rotating the inner cone to the correct setting and locking into place with a single nut. For cleaning purposes the unit can be easily removed, cleaned and replaced without affecting the adjustment of the valve.

**Fixing:** The mounting ring should be secured in position, the valve can then be fixed by a screw action to locate the valve lugs into grooves in the mounting ring itself.

**Construction:** The HAS supply valve is manufactured from a high quality sheet steel, stove enamelled in white. To help prevent air leakage the valve body has a cellular plastic gasket to form an airtight seal with the mounting ring. Every valve is supplied with a galvanised mounting ring and a measuring data sheet to facilitate accurate adjustment.

**Fire rated supply valves are also available in 100mm and 125mm diameters — Tested to BS476 part 20 with 2-hour fire rating. Use order code VFS.**

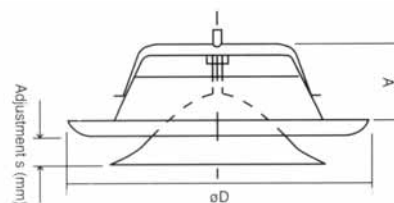

Duct Dia	fID	A	Weight g
80	115	41	140
100	137	47	190
125	164	49	310
150	202	51	350
160	212	60	500
200	248	75	730


## Steel Extract Valve (VME)

Manufactured to the same exacting standards as the steel supply valve our range of steel extract valves offer quality, performance and value. With a neat appearance and sturdy construction it offers performance criteria to meet the demands of virtually any ventilation system.

**Fixing:** As for steel supply valve.

**Construction:** As for the steel supply valve.

**Fire rated extract valves are also available in 100mm, 125mm, 160mm and 200mm diameters — Tested to BS476 part 20 with 2-hour fire rating. Use order code VFE.**

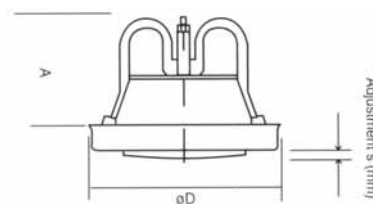

Duct Dia	fID	A	Weight g
100	134	74	280
125	160	85	360
150	191	89	470
160	191	89	470
200	241	107	720

**Head Office:**  
 Heath Mill Road, Wombourne,  
 Wolverhampton,  
 West Midlands, WV5 8AP  
 Tel: (01902) 895161  
 Fax: (01902) 892045

[www.hotchkissairsupply.co.uk](http://www.hotchkissairsupply.co.uk) email: [sales@hotchkissairsupply.co.uk](mailto:sales@hotchkissairsupply.co.uk)