




HOTCHKISS AIR SUPPLY

Heating, Ventilating & Air Movement Equipment

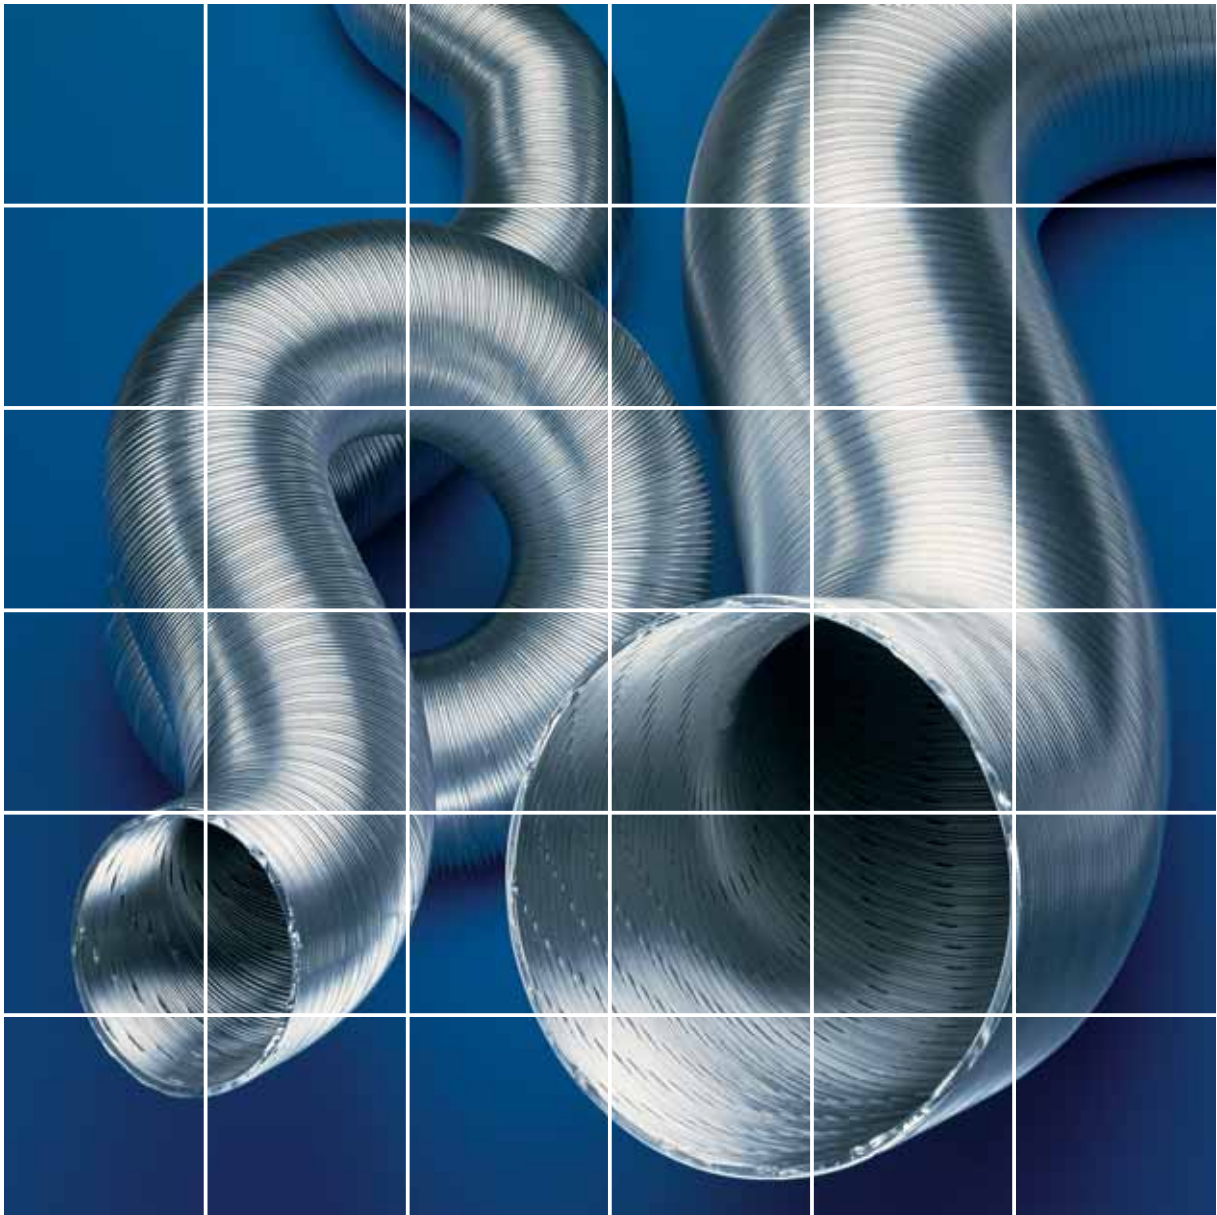

H a s f l e x P A K F l e x i b l e D u c t i n g



Application

The HASFLEX PAK is a range of corrugated flexible ducting in aluminium which can be easily formed to produce bends with radii less than 1/2 dia. HASFLEX PAK offers extra flexibility coupled with strength to meet the needs required for various industrial purposes as well as many HVAC applications.

Construction

HASFLEX PAK is manufactured from 99% pure aluminium strip spirally wound to produce a double overlapped crimp locked joint, which is resistant to unwinding and is pressure tight to 2500 pa.

Advantages

- Naturally retains its corrugation form and also achieves maximum distance between supports without sagging
- Supplied in standard 3 metre lengths compressed to 1 metre
- Individually boxed
- Strong and flexible
- Easy to connect to circular ducting
- No special tools required for cutting or fixing
- The products have been successfully tested to BS476 part 6, 7 and 8 with negligible smoke generation

Technical data

Duct material	99% Pure aluminium
Diameter range (mm)	80-500
Temperature range °C	-30/+280
Maximum air velocity	25m/sec
Max. positive working pressure	2500Pa
Standard length	3 metre
Compressed length	1 metre
Packing	Individual boxed
Clamping	Hasflex Lightning Band, Stainless Steel Clamps, Quick Release Clamps

Head Office:
Heath Mill Road, Wombourne,
Wolverhampton,
West Midlands, WV5 8AP
Tel: (01902) 895161
Fax: (01902) 892045

www.hotchkissairsupply.co.uk email: sales@hotchkissairsupply.co.uk