




HOTCHKISS AIR SUPPLY

Heating, Ventilating & Air Movement Equipment

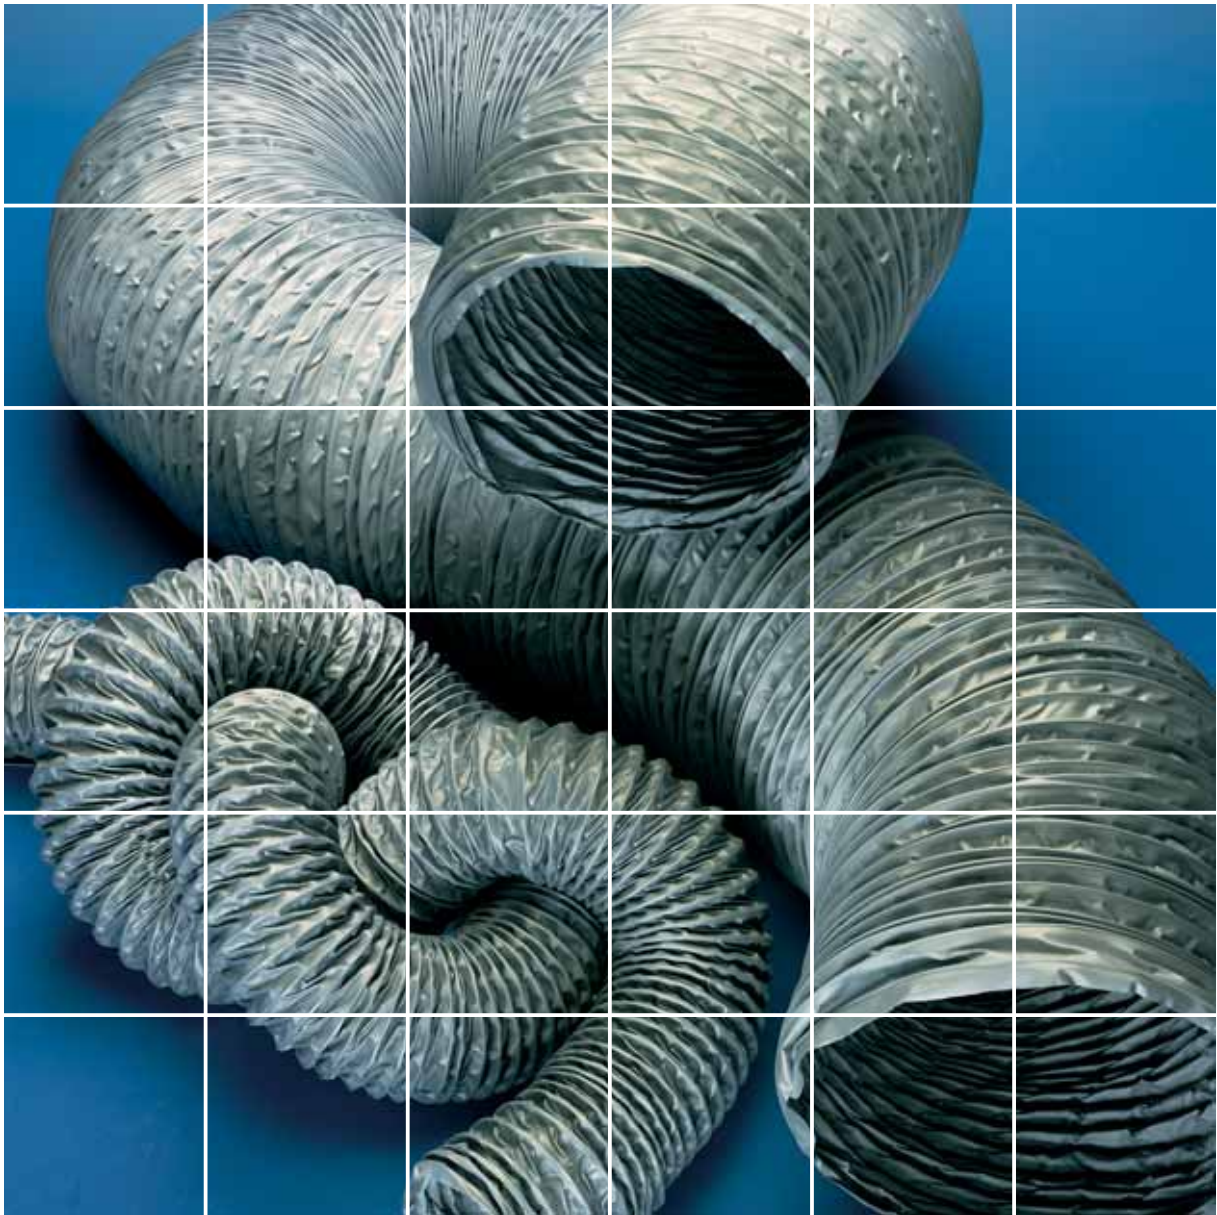

H a s f l e x P V C F l e x i b l e D u c t i n g



Application

The grey reinforced ducting is manufactured for the HVAC market and industrial purposes. It is suitable for all normal ventilation and air conditioning systems, including high pressure, and successfully withstands constant bending or flexing.

Construction

The new product will not be a coated PVC but a double laminated reinforced with high density scrim.

Advantages

- Supplied in standard 6 metre length, compressed to 0.8 metre
- Individually boxed
- Easy to connect to either round or oval ducting
- No special tools required for cutting or fixing

Technical data

Diameter range (mm)	80-610
Temperature range °C	-10/+75
Maximum air velocity	30m/sec
Max. positive working pressure	3000pa
Standard length	6 metre
Packing	Individual box of 0.8 metre
Clamping	Hasflex Lightning Band, Stainless Steel Clamps, Nylon Clamps and Quick Release Clamps

Head Office:
Heath Mill Road, Wombourne,
Wolverhampton,
West Midlands, WV5 8AP
Tel: (01902) 895161
Fax: (01902) 892045

www.hotchkissairsupply.co.uk email: sales@hotchkissairsupply.co.uk